



Model: JLV-300M-12 Size: 185*94*49mm
JLV-300M-24



Brief Information

300W

Rainproof Power Supply (C.V.)

Model JLV-300M-12 / JLV-300M-24

Input 200-250V AC

Output 12VDC 25A 300W / 24VDC 12.5A 300W

Product Features

- Rainproof, big wattage for outdoor use
- High transfer efficiency
- Semi-Potting design, dust-proof
- Stable constant voltage output
- 100% full loading, 100% burn-in tested
- Overload/short circuit protection

MAIN ELECTRICAL DATA

AC Input

Input Voltage	200-250V AC
Input Frequency	50/60Hz
Efficiency (Typ.)	84%
Input Current	230V: 2A max.
Inrush Current	60A
Leakage Current	5mA/230VAC

DC Output

Output Voltage	12V	24V
Rated Current	25A	12.5A
Rated Power	300W	300W
Ripple & Noise (Max.)	<300mVp-p	<300mVp-p
Setup, Rise Time	1500ms/230VAC	1500ms/230VAC
Line Regulation	1%	1%
Load Regulation	1%	1%

Service Environment

Working Temp.	-25°C~50°C
Working Humidity	20~98%RH
Storage Temp.	-40°C~80°C
Storage Humidity	10~98%RH

Protection

Overload	Yes, voltage drop mode Output voltage drops if over-loaded
Short Circuit	Yes, cut-off mode, recovers automatically after fault condition is removed

Safety

Safety Standard	EN 61347-2-13
Withstand Voltage	I/P-O/P: 3000VAC/1min/<5mA
Isolation Resistance	I/P-O/P: >100M Ohms / 500VDC /25°C / 70%RH


Packaging Information

Product Dimension	185*95*49mm
Products Net Weight	500G
PCS/Carton(QTY)	20 PCS
Master Carton Size	40.5*28*21.5cm
G. Weight/ Carton	11.2KG

Installation Tips:

- Please identify the power supply's input and output before installation.
- Ensure correct output + & - wire connection.
Power on after wire connection is done.
- To avoid voltage drop and loading capacity wasting on the output extension wire, please install the power supply to the loading as near as possible, if must use long extension wires, thicker wires and less loading wattage is required.
- The power supply to be installed at good ventilation and cooling environment.

Physical Drawing

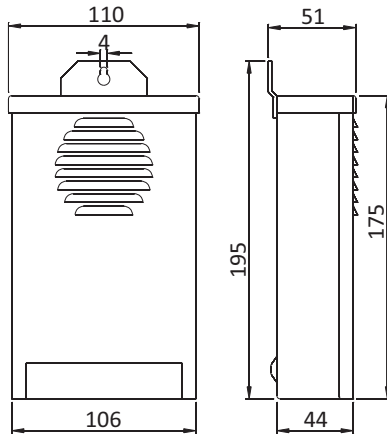

Unit: mm

Brief Information

300W

Rainproof Power Supply (C.V.)

Model JLV-300M-12 / JLV-300M-24

Input 200-250V AC


Output 12VDC 25A 300W / 24VDC 12.5A 300W

Input & Output:


9500-9P Screw Terminals With Cover
inflamming retarding

Housing: Aluminium

Block Diagram

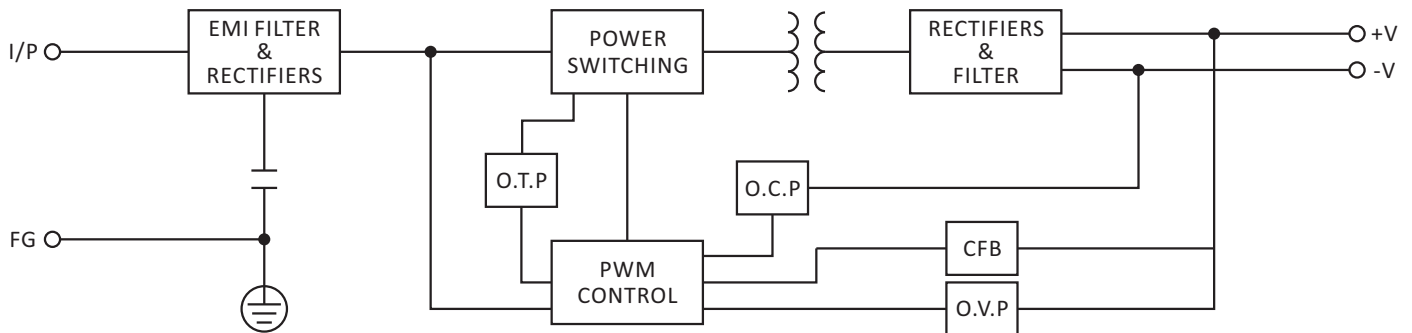

Derating Curve

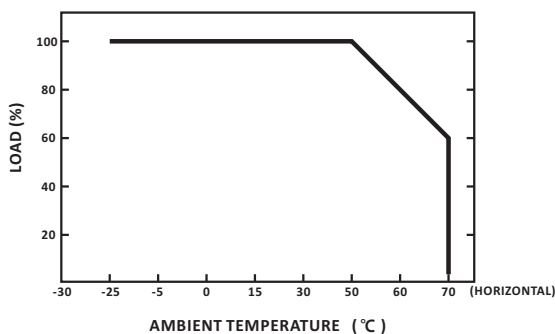

Static Characteristics

